


# Band-Specific High Power Amplifier

Product Name : RCA800H50D2, Code Name : A3Y3SD3OI45

Doc. Name : General Spec.

---

<p style="text-align: center;"><b>General Specification</b> for <b>RCA800H50D2</b></p>
--



1

---

### RESTRICTION ON USE, DUPLICATION, OR DISCLOSURE OF PROPRIETARY INFORMATION

This document contains proprietary information, which is the sole property of RFcore co., LTD.

The document is submitted to the recipient for his use only.

By receiving this document the recipient undertakes not to duplicate the documents or to disclose in part of, or the whole of, any of the information contained herein to any third party without receiving before hand, written permission from the submitting company.

Created	Printed	Document Number	Revision	Manufacturer
2015/1/14	2015/1/14		B	<b>RFcore co.,Ltd</b>
File : RCA800H50D2 General Spec.docx				

*The Specifications is subject to change before finalization*

Customer Service: Tel. 82-31-708-7575

Email: [sales@rfcore.com](mailto:sales@rfcore.com)

<http://www.rfcore.com>

# Band-Specific High Power Amplifier

Product Name : RCA800H50D2, Code Name : A3Y3SD3OI45

Doc. Name : General Spec.

ELECTRICAL SPECIFICATIONS		@ 50 Ohms load, 27 Vdc, Tc = 35 °C
Parameter	Specification	Remark
Frequency Range	791 ~ 894 MHz	
Saturated Output Power	50 dBm min.	
Small Signal Gain @ Center Frequency	45 ± 0.5 dB	Input = -15dBm
Gain Flatness	Peak to Peak 4 dB	Input = -15dBm, Over Freq Band & Temp
Gain Stability	± 1.5 dB	Operating temp.
Maximum Input Power for no damage on DC ON	10 dBm max	
Maximum Input Power for no damage on DC OFF	25 dBm max	
Input / Output VSWR	Less than 1.5 : 1	
On/Off Switching time	5uS max.	
DC Input Current	14 A max. 12 A typ.	@ Pout = 100W
DC Input Voltage	+27 ± 1.0 Vdc	
RF Input Signal Format	CW	
I/O Map	1. GND	
	2,7. Do not connect	
	3. VSWR Fail Alarm	Alarm : reflected power = 25~ 50W @ Fcenter
	4. Temperature Monitor	VT= 3.6 - 0.022 x ( T-30) T = Case Temperature ± 5°C
	5. Over Temp Alarm	Alarm : High(5V) @ case temp. 85 ± 5°C
	6. Enable (Active low)	pulled-up@5V with 10KΩ
	8. Forward Power Monitor	4 ±0.1V @ CW 50dBm, slope : 0.1V/dB Vpin8 = 4-(50-Pout)x0.1±0.1V
	9. Reflected Power Monitor	Vpin9 is the output of diode detector. it has non- log slope characteristic. 0.2 ~ 1V @ 10W ~ 100W @ Fcenter

2

ENVIRONMENTAL SPECIFICATIONS		
Parameter	Specification	Remark
Operating Case Temperature	-20 ~ 75 °C	
Storage Temperature	-40 ~ 85 °C	

Created	Printed	Document Number	Revision	Manufacturer
2015/1/14	2015/1/14		B	<b>RFcore co.,Ltd</b>
File : RCA800H50D2 General Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

http://www.rfcore.com

# Band-Specific High Power Amplifier


Product Name : RCA800H50D2, Code Name : A3Y3SD3O145

Doc. Name : General Spec.

## MECHANICAL SPECIFICATIONS

Parameter	Specification	Remark
Dimension	170 x 135 x 25 mm	
RF Input / Output Connector	SMA – Female(2H) / SMA – Female(2H)	
DC Connector	3W3P(A1: +27V, A2: GND, A3: N.C)	
Control Connector	D-Sub 9Pin Male	
Cooling	Adequate Heat-sink required	

## MECHANICAL DRAWING

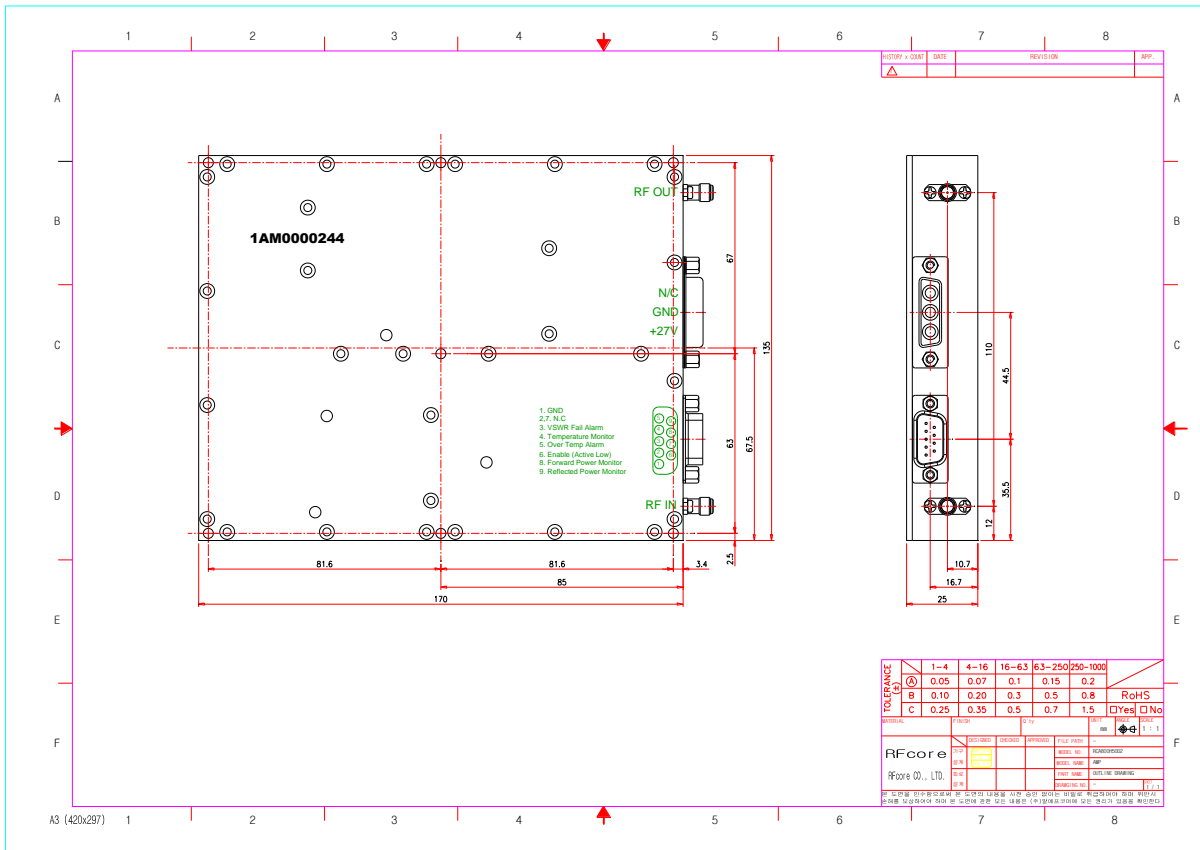

3

Created	Printed	Document Number	Revision	Manufacturer
2015/1/14	2015/1/14		B	<b>RFcore co.,Ltd</b>
File : RCA800H50D2 General Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

http://www.rfcore.com