

# Band-Specific High Power Amplifier

Product Name : RCA2100H42CW

Doc. Name : General Spec.

---

<p style="text-align: center;"><b>General Specification</b> for <b>RCA2100H42CW</b></p>
---

1

### RESTRICTION ON USE, DUPLICATION, OR DISCLOSURE OF PROPRIETARY INFORMATION

This document contains proprietary information, which is the sole property of RFcore co., LTD.

The document is submitted to the recipient for his use only.

By receiving this document the recipient undertakes not to duplicate the documents or to disclose in part of, or the whole of, any of the information contained herein to any third party without receiving before hand, written permission from the submitting company.

Created	Printed	Document Number	Revision	Manufacturer
2010/2/19	2017/2/6		B	<b>RFcore co.,Ltd</b>
File : RCA2100H42CW General Spec.docx				

*The Specifications is subject to change before finalization*

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com

<http://www.rfcore.com>

# Band-Specific High Power Amplifier

Product Name : RCA2100H42CW

Doc. Name : General Spec.

## ELECTRICAL SPECIFICATIONS

Parameter	Specification	Remark
Frequency Range	2100 ~ 2200 MHz	
Saturated Output Power	15 W(42dBm) min	Operating Temp. , CW
Gain	38 ± 1.0 dB	Input level = -15dBm, Operating Temp.
Gain Flatness	Peak to Peak 2.0 dB	Input level = -15dBm, Operating Temp. , Over Freq. band
Gain Stability	± 1.0 dB	Operating Temp.
Input / Output VSWR	Less than 1.5 : 1	
Maximum Input Power	7 dBm	
DC Current Consumption	2.5 A maximum	@ Pout = 15W, Operating Temp.
DC Input Voltage	27 ± 1.0Vdc	
I/O Map	1. Enable(Active Low)	(Enable = 0V, Disable = 5V) pulled-up @ 5V with 10k ohm
	2. Power Monitor	Log slop detector Vpin2=4 ±0.1 @ CW 42dBm , slope:0.1V/dB Vpin2= 4 -(42-Pout)*0.1±0.1V
	3. N.C	
	4. Reflect Power Monitor	Linear slop detector : diode type Reflected Power = 37.5 ± 1.5dBm
	5. VSWR Fail Alarm	VSWR Alarm when Reflected Power > 37.5 dBm
	6,7 Vcc	
	8,9 GND	

2

## ENVIRONMENTAL SPECIFICATIONS

Parameter	Specification	Remark
Operating Case Temperature	-20 ~ 60 °C	
Storage Temperature	-40 ~ 85 °C	

## MECHANICAL SPECIFICATIONS

Parameter	Specification	Remark
Dimension	95 x 80 x 22 mm	
RF Input / Output Connector	SMA – Female	
Interface Connector	D-Sub 9Pin Male	

Created	Printed	Document Number	Revision	Manufacturer
2010/2/19	2017/2/6		B	<b>RFcore co.,Ltd</b>
File : RCA2100H42CW General Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575

Email: sales@rfcore.com


http://www.rfcore.com

# Band-Specific High Power Amplifier

Product Name : RCA2100H42CW

Doc. Name : General Spec.

## MECHANICAL DRAWING

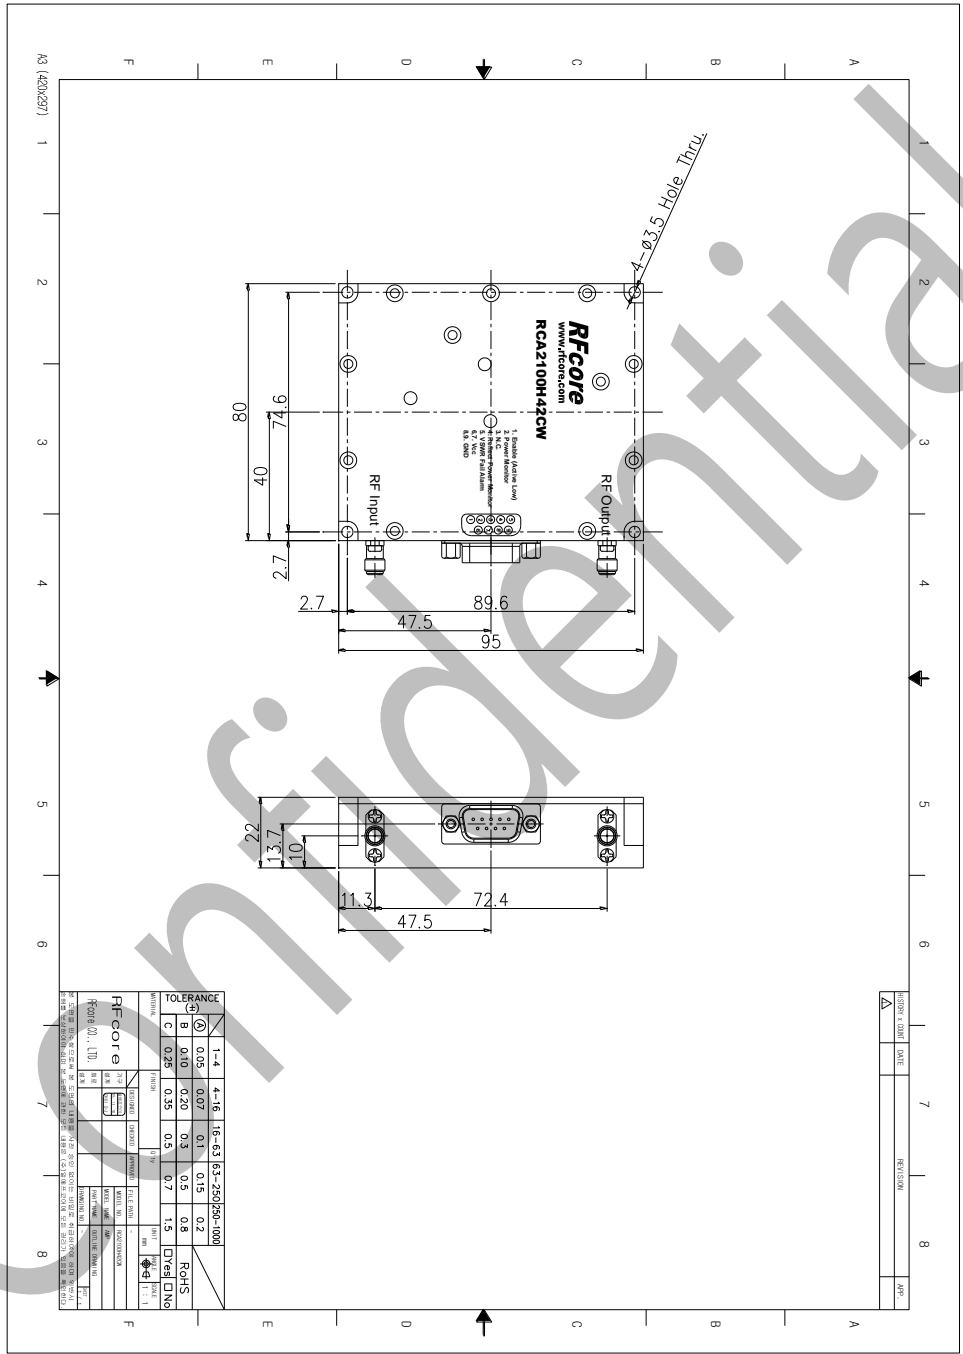

Created	Printed	Document Number	Revision	Manufacturer
2010/2/19	2017/2/6		B	<b>RFcore co.,Ltd</b>
File : RCA2100H42CW General Spec.docx				

The Specifications is subject to change before finalization

Customer Service: Tel. 82-31-708-7575  
 Email: sales@rfcore.com  
 http://www.rfcore.com